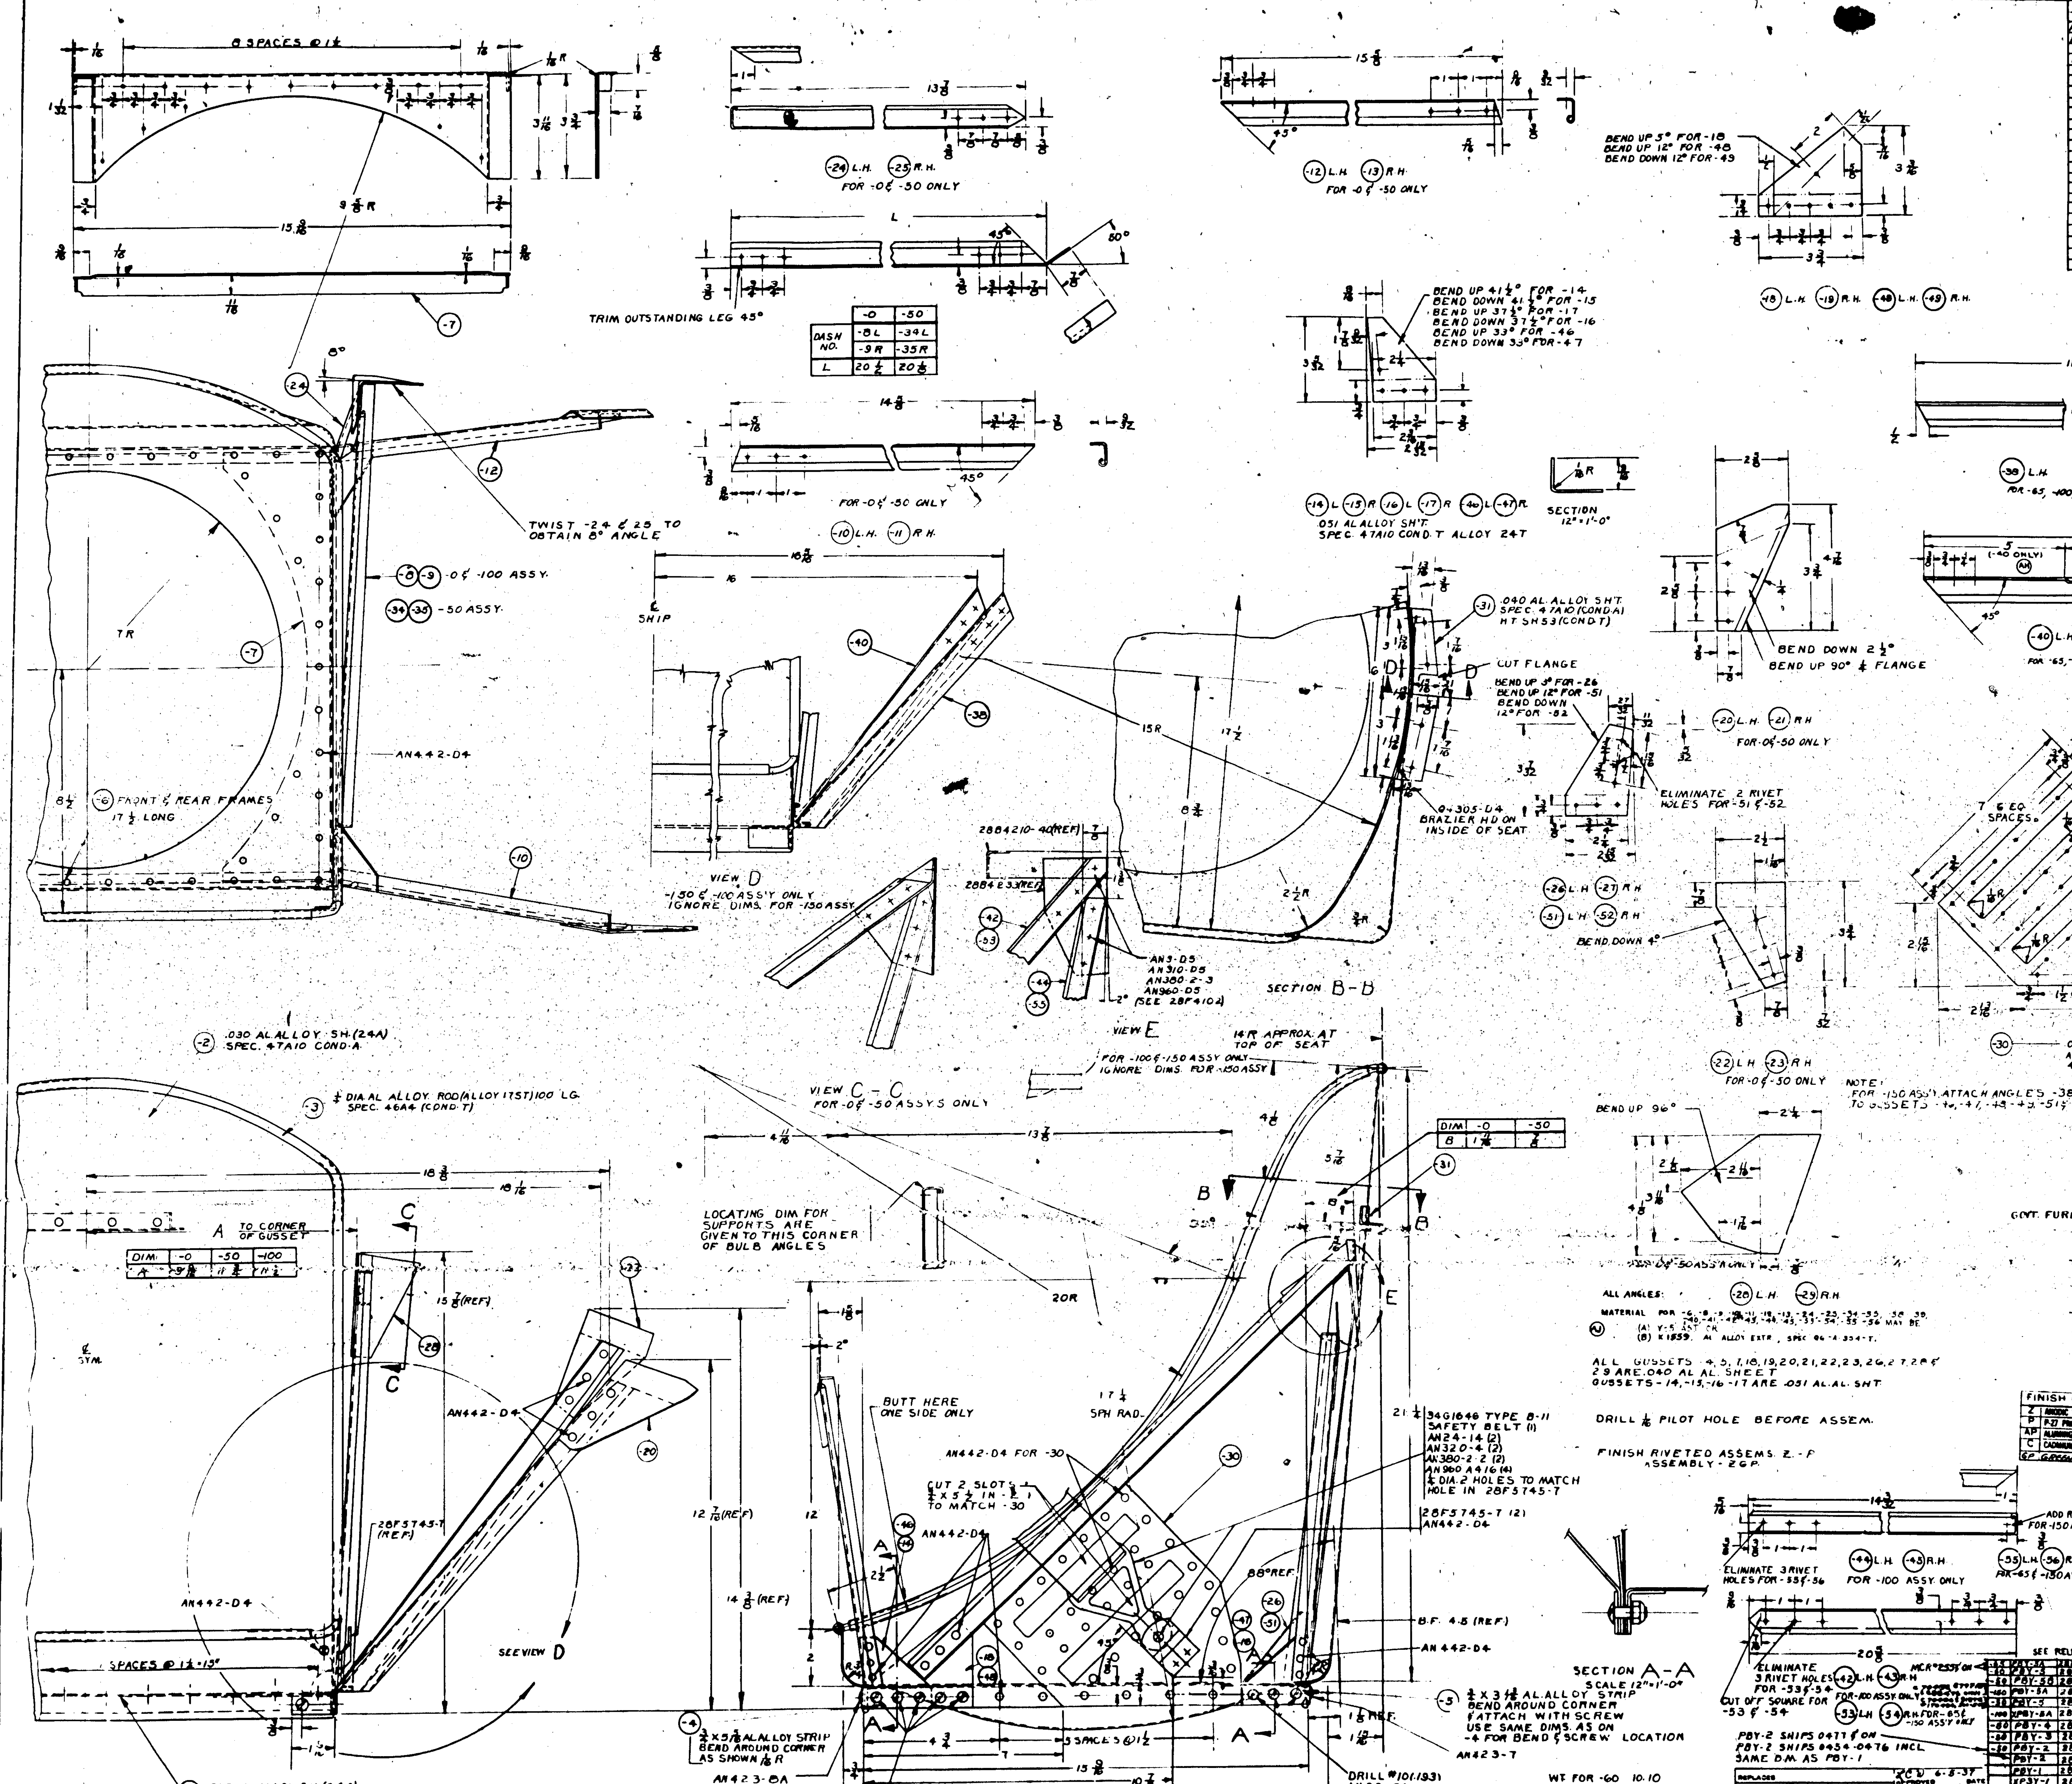

ALL AL ALLOY SHEET SPEC 4TA10 (COND T) ALLOY 24T EXCEPT AS NOTED
ALL AL ALLOY EXTRUSIONS SPEC. QQ-A-354-T. ALLOY 24T EXCEPT AS NOTED
H.T. ALL COND A MATERIAL AS PER SPEC. SR-53
RIVETS AL ALLOY EXCEPT AS NOTED

SUPPLIES & EQUIPMENT CLASSIFICATION

LET	ALTERATION	DATE	BY
AG	PHOTO TRACED	6-26-43	
AH	ADDED DIM 5⅛ & 3 SEC F-F FOR -40 ONLY. NO WT. CHG.	7-25-43	
AJ	ON FACE OF DWG., REPLACED NOTE "ALL ANGLES --- (-6, 8, 9, 10, 11, 12, 13, 24, 34, 35, 36, 37) ARE ⅞ x ⁵⁄₁₆ x .040 AL. AL. BULB ANGLES ALCOA DIE "K1550" WITH "MATERIAL FOR -6, -8, -10, -11, -24, -25, -34, -35, -38 THRU -45, & -53 THRU -56 BE (A) Y-5-AST, OR (B) K1555 AL ALLOY EXTR., SPEC. QQ-A-354-T." AT BASE OF DWG. REPLACED "SPEC. 46A0 COND. T." WITH "SPEC. QQ-A-354-T." WT INCREASE 0.2696.	9-10-43	HOOK

SCALE 6" = 1'-0"

NAVY NOTED

NOTED — SPEC. | NOTED — HEAT TREAT | NOTED — FINISH

CONSOLIDATED AIRCRAFT CORP. BUFFALO, N.Y.

MECHANIC'S SEAT-FURNISH. -

J 28F133

R 28F133

H 267